interweb

Generated on 28/11/2026 21:58

KNOWLEDGE BASE · PUBLIC DOCUMENT

Why every model id has a slash, and the model_not_found error

Playground & Text Models


CODE	VERSION	COUNTRY · LANGUAGE
RLX-MZ-KB-2984	v2026.11.28	Mozambique · English

Interweb Mozambique
RLX Holdings, S.A. · Group RLX Holdings
Tax ID (NUIT) 401 191 607 · Legal entity no. (NUEL) 105 045 974 · Economic activity code (CAE) 62022

https://www.meu.interweb.co.mz/knowledgebase/2984

Why every model id has a slash, and the model_not_found error

Playground & Text Models Created on **November 28, 2026** 2 min read

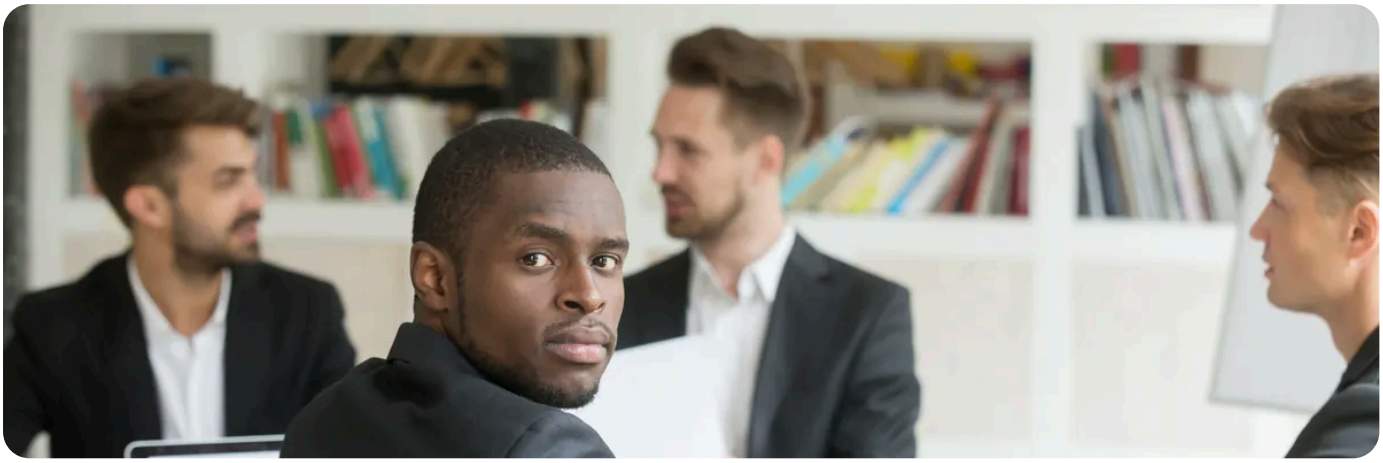

Every catalog id has at least one slash, such as `deepseek-ai/deepseek-v4-flash`. The part before the first slash is who made the model. You send the id exactly as it is, slash included. Without it, the API cannot find the model.

How to read an id

Id	How to read it
`deepseek-ai/deepseek-v4-flash`	Who made the model (`deepseek-ai`), a slash and the model. In `GET /v1/models` , the first part also comes in `owned_by` .
`openai/gpt-image-2/text-to-image`	For image, video and voice models, the end of the id usually says what the model does, such as `text-to-image` .
`agent/...`	One of your agents, with the id you copy on the Agents tab.

The model_not_found error

The API answers `404` with `model_not_found` in these cases:

Cause	Example
The id does not exist or is incomplete.	You sent `deepseek-v4-flash` , without the part before the slash.
The model is the wrong type for the operation.	An image model in chat. Chat only takes text models and agents; generations take image, video and voice models.
The agent belongs to another account.	Each account only sees and uses its own agents.

How to fix it

1. Open the **Models** tab and click **Copy the id** on the model you want.
2. Check the type: Text for chat; Image, Video or Audio for generations.
3. Paste the id with no extra spaces or quotes and repeat the request.

In coding tools

Some tools add a prefix of their own before the id. In Aider the model is written `openai/deepseek-ai/deepseek-v4-flash`; in OpenCode, `api/moonshotai/kimi-k2.7-code`, with the provider name you gave in the file. The prefix belongs to the tool: what comes after it must be the exact catalog id. See **Aider** and **OpenCode**.

! If a model leaves the catalog, its id stops working and the answer becomes `model_not_found`. Choose another one on the Models tab.

RECOMMENDED

Copy the right id on the All in One AI Models tab.

See All in One AI →

SEE ALSO

- **The Models tab: searching for a model and copying its id** →
- **Errors when setting up a tool with All in One AI: 401, model not found, no credits, /v1 and rejected config files** →
- **Using your AI agent through the API: agent/ in the model field** →
- **Choosing a text model: price, context window and what each one is for** →
- **All in One AI** →

interweb

Interweb Mozambique

RLX Holdings, S.A. · Group RLX Holdings

TAX ID (NUIT)	401 191 607
LEGAL ENTITY NO. (NUEL)	105 045 974
ECONOMIC ACTIVITY CODE (CAE)	62022
REGISTERED OFFICE	Bairro 7 de Setembro Vilankulo 1304 · CEP 0411-02, Inhambane, Mozambique
CONTACT	info@interweb.co.mz · +258 84 635 1111 · +258 86 635 1111 · www.interweb.co.mz
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-MZ-KB-2984 · v2026.11.28 · Generated on 28/11/2026 21:58