interweb

Generated on 29/11/2026 11:26

KNOWLEDGE BASE · PUBLIC DOCUMENT

An OpenAI and Anthropic compatible AI gateway: the formats and addresses that work

Using the AI API

CODE	VERSION	COUNTRY · LANGUAGE
RLX-MZ-KB-3274	v2026.11.29	Mozambique · English

Interweb Mozambique
RLX Holdings, S.A. · Group RLX Holdings
Tax ID (NUIT) 401 191 607 · Legal entity no. (NUEL) 105 045 974 · Economic activity code (CAE) 62022

https://www.meu.interweb.co.mz/knowledgebase/3274

An OpenAI and Anthropic compatible AI gateway: the formats and addresses that work

Using the AI API Created on **November 29, 2026** 2 min read

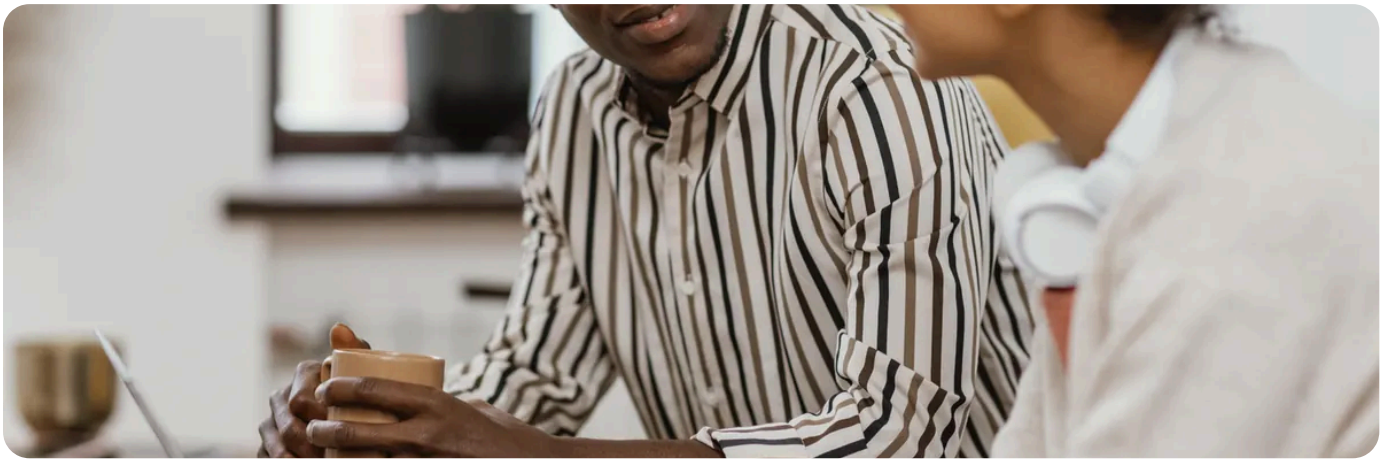

All in One AI is an AI gateway that speaks the formats most programs already know. Everything lives at the same address, `api.interweb.co.mz/v1`, and the key goes in the `Authorization: Bearer` header. This table shows what works on each path.

The gateway paths

Path	Format	What for
`POST /v1/chat/completions`	OpenAI Chat Completions	The OpenAI SDK, n8n and apps that accept an OpenAI-compatible address
`POST /v1/responses`	OpenAI Responses	Codex CLI and programs that use this format. See **the Responses format**
`POST /v1/messages`	Anthropic Messages	Claude Code and apps made for Claude. See **the Messages format**
`GET /v1/models`	Model list in the OpenAI format	Picking the model id and seeing the price, with the `type` and `q` filters
`POST /v1/media/generations`	The gateway's own	Images, videos and voice. The OpenAI SDK does not have these operations: you use plain HTTP requests.

Moving a program to the gateway

In a program that already uses one of these formats, three things change: the base URL becomes `api.interweb.co.mz/v1`, the key becomes your `prod_` or `sandbox_` key, and the model becomes an id from our catalog, always with a slash. With the OpenAI SDK, in Python:

```
import os
from openai import OpenAI

client                    =                    OpenAI(base_url="api.interweb.co.mz/v1",
api_key=os.environ["INTERWEB_API_KEY"])
r = client.chat.completions.create(
    model="deepseek-ai/deepseek-v4-flash",
    messages=[{"role": "user", "content": "Hello! Answer in one sentence."}],
    max_tokens=100,
)
print(r.choices[0].message.content)
```

In Claude Code the address goes without `/v1`. Each tool has its own article: see **which coding tool to use**.

What is the same and what is ours

Errors come in our API format, with `code`, `message` and `correlation_id` inside `error`. The OpenAI SDK reads the message from `error.message` and raises the exception with the HTTP status, as it would anywhere else. There are two codes you will meet here: `402 insufficient_credits`, when the balance is not enough, and `409 agent_paused`, for agents. See **the AI API errors**.

A program that asks for an "OpenAI-compatible endpoint" or a "custom base URL" nearly always works. See **any app that accepts an OpenAI-compatible address**.

RECOMMENDED

Want to see the models you can use? Open All in One AI.

See All in One AI →

SEE ALSO

- **Using the OpenAI SDK**
- **Apps made for Claude**
- **What an AI gateway is**
- **All in One AI**

interweb

Interweb Mozambique

RLX Holdings, S.A. · Group RLX Holdings

TAX ID (NUIT)	401 191 607
LEGAL ENTITY NO. (NUEL)	105 045 974
ECONOMIC ACTIVITY CODE (CAE)	62022
REGISTERED OFFICE	Bairro 7 de Setembro Vilankulo 1304 · CEP 0411-02, Inhambane, Mozambique
CONTACT	info@interweb.co.mz · +258 84 635 1111 · +258 86 635 1111 · www.interweb.co.mz
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-MZ-KB-3274 · v2026.11.29 · Generated on 29/11/2026 11:26